




SUPER FLEX™
POLYURETHANE SYNCHRONOUS BELTS



PITCH SPECIFICATIONS SUPER FLEX™ BELTS

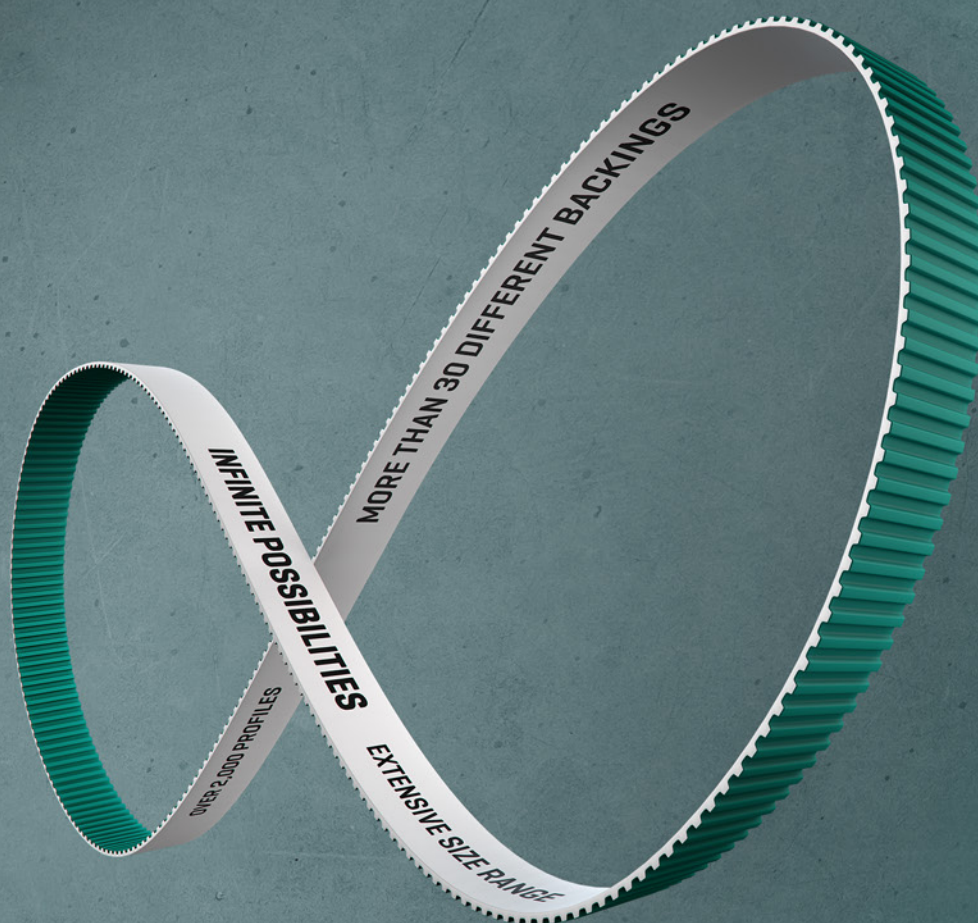

SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

TABLE OF CONTENT


T5 Pitch: 5 mm	3	AT20-HF Pitch: 20 mm	16
T10 Pitch: 10 mm	4	ATL20 Pitch: 20 mm	17
T10-HF Pitch: 10 mm	5	ATL20-NIRO Pitch: 20 mm	18
T20 Pitch: 20 mm	6	HTD®5 Pitch: 5 mm	19
T20-HF Pitch: 20 mm	7	HTD®L5 Pitch: 5 mm	20
T20-NIRO Pitch: 20 mm	8	HTD®8 Pitch: 8 mm	21
AT5 Pitch: 5 mm	9	HTD®8-HF Pitch: 8 mm	22
AT10 Pitch: 10 mm	10	HTD®8-NIRO Pitch: 8 mm	23
AT10-HF Pitch: 10 mm	11	HTD®14 Pitch: 14 mm	24
AT10-NIRO Pitch: 10 mm	12	HTD®14-HF Pitch: 14 mm	25
ATL10 Pitch: 10 mm	13	H Pitch: 12.7 mm	26
ATL10-HF Pitch: 10 mm	14	H-HF Pitch: 12.7 mm	27
AT20 Pitch: 20 mm	15		





SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

T5 | Pitch: 5 mm

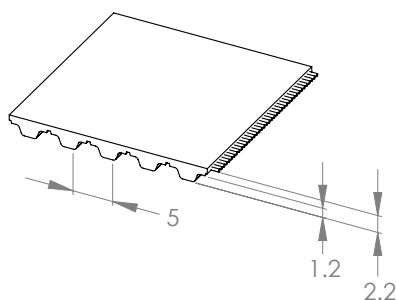


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	10
Minimum Pulley Diameter	15.91 mm
Minimum Back Bend Diameter	30 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	10	16	25	32	50	75	100
Tensile Strength (Average Value) F_{Break} (N)							
Steel	1,250	2,000	3,375	4,250	6,875	10,375	13,875
Allowable Belt Force F_{1all} (N)							
Steel	311	498	840	1,058	1,711	2,582	3,453
Allowable Effective Force F_{eall} (N)							
(Minimum 15 Teeth are in Mesh)	356	570	890	1,139	1,780	2,670	3,560
Specific Belt Mass m_{sp} (kg/m/mm)							
Steel	0.0022						
Specific Belt Stiffness c_{sp} (N)							
Steel	77,778	124,444	210,000	264,444	427,778	645,556	863,333



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

T10 | Pitch: 10 mm

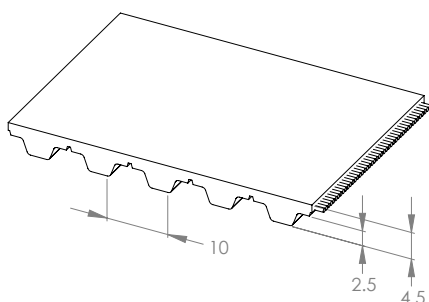


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	14
Minimum Pulley Diameter	44.56 mm
Minimum Back Bend Diameter	80 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	16	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)							
Steel	4,200	7,140	9,240	14,700	22,260	29,820	44,940
Allowable Belt Force F_{tall} (N)							
Steel	1,123	1,909	2,470	3,929	5,950	7,971	12,012
Allowable Effective Force F_{eall} (N)							
(Minimum 15 Teeth are in Mesh)	1,082	1,690	2,163	3,380	5,070	6,760	10,140
Specific Belt Mass m_{sp} (kg/m/mm)							
Steel	0.0044						
Specific Belt Stiffness c_{sp} (N)							
Steel	280,662	477,125	617,456	982,316	1,487,507	1,992,699	3,003,081



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

T10-HF | Pitch: 10 mm

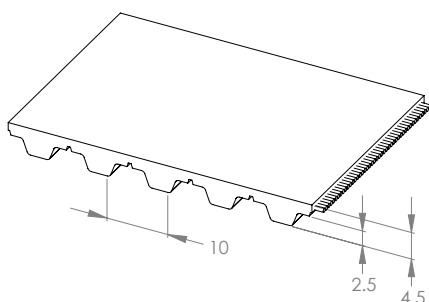


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	12
Minimum Pulley Diameter	38.2 mm
Minimum Back Bend Diameter	60 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	16	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)							
Steel	6,200	10,540	13,640	21,700	32,860	44,020	66,340
Allowable Belt Force F_{tall} (N)							
Steel	1,376	2,340	3,028	4,818	7,295	9,773	14,728
Allowable Effective Force F_{eall} (N)							
(Minimum 15 Teeth are in Mesh)	1,082	1,690	2,163	3,380	5,070	6,760	10,140
Specific Belt Mass m_{sp} (kg/m/mm)							
Steel	0.0047						
Specific Belt Stiffness c_{sp} (N)							
Steel	344,118	585,000	757,059	1,204,412	1,823,824	2,443,235	3,682,059



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

T20 | Pitch: 20 mm

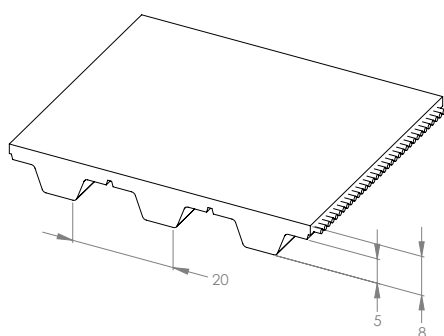


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	15
Minimum Pulley Diameter	95.49 mm
Minimum Back Bend Diameter	120 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	18,050	29,450	44,650	59,850	90,250
Allowable Belt Force F_{all} (N)					
Steel	4,739	7,731	11,722	15,712	23,693
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	4,045	6,320	9,480	12,640	18,960
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0075				
Specific Belt Stiffness c_{sp} (N)					
Steel	1,184,650	1,932,850	2,930,450	3,928,050	5,923,250



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

T20-HF | Pitch: 20 mm

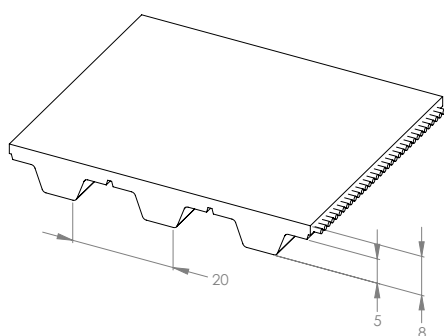


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	12
Minimum Pulley Diameter	76.39 mm
Minimum Back Bend Diameter	100 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	16,435	26,815	40,655	54,495	82,175
Allowable Belt Force F_{all} (N)					
Steel	4,378	7,142	10,829	14,515	21,888
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	4,045	6,320	9,480	12,640	18,960
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0072				
Specific Belt Stiffness c_{sp} (N)					
Steel	1,094,400	1,785,600	2,707,200	3,628,800	5,472,000



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

T20-NIRO | Pitch: 20 mm

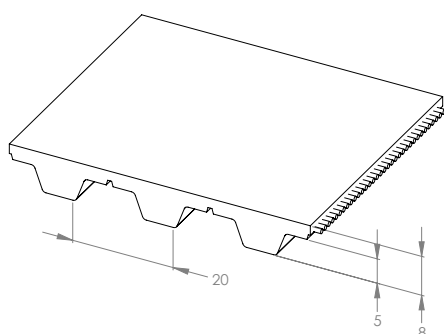


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	20
Minimum Pulley Diameter	127.32 mm
Minimum Back Bend Diameter	160 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	13,538	22,088	33,488	44,888	67,688
Allowable Belt Force F_{all} (N)					
Steel	3,554	5,799	8,791	11,784	17,770
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	4,045	6,320	9,480	12,640	18,960
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0074				
Specific Belt Stiffness c_{sp} (N)					
Steel	888,488	1,449,638	2,197,838	2,946,038	4,442,438



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

AT5 | Pitch: 5 mm

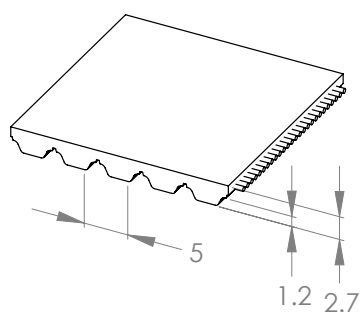

Specifications


Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	15
Minimum Pulley Diameter	23.87 mm
Minimum Back Bend Diameter	60 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	10	16	25	32	50	75	100
Tensile Strength (Average Value) F_{Break} (N)							
Steel	2,565	4,275	7,125	9,120	14,535	21,945	29,355
Allowable Belt Force F_{tall} (N)							
Steel	634	1,056	1,761	2,253	3,591	5,422	7,253
Allowable Effective Force F_{eall} (N)							
(Minimum 15 Teeth are in Mesh)	516	826	1,290	1,651	2,580	3,870	5,160
Specific Belt Mass m_{sp} (kg/m/mm)							
Steel	0.0033						
Specific Belt Stiffness c_{sp} (N)							
Steel	158,445	264,075	440,125	563,360	897,855	1,355,585	1,813,315



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

AT10 | Pitch: 10 mm

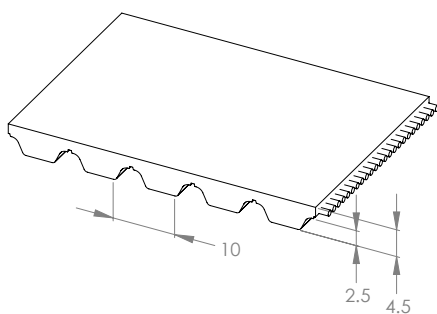


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	15
Minimum Pulley Diameter	47.75 mm
Minimum Back Bend Diameter	120 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)						
Steel	14,250	18,050	29,450	44,650	59,850	90,250
Allowable Belt Force F_{1all} (N)						
Steel	3,741	4,739	7,731	11,722	15,712	23,693
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	2,580	3,302	5,160	7,740	10,320	15,480
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0057					
Specific Belt Stiffness c_{sp} (N)						
Steel	935,250	1,184,650	1,932,850	2,930,450	3,928,050	5,923,250



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

AT10-HF | Pitch: 10 mm

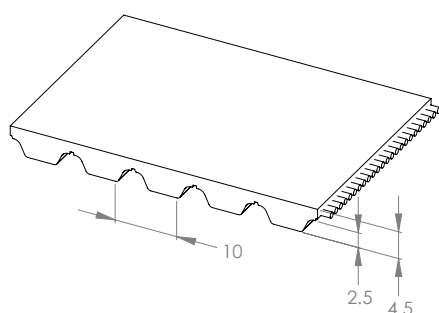

Specifications


Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	12
Minimum Pulley Diameter	38.20 mm
Minimum Back Bend Diameter	100 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)						
Steel	12,975	16,435	26,815	40,655	54,495	82,175
Allowable Belt Force F_{1all} (N)						
Steel	3,456	4,378	7,142	10,829	14,515	21,888
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	2,580	3,302	5,160	7,740	10,320	15,480
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0055					
Specific Belt Stiffness c_{sp} (N)						
Steel	864,000	1,094,400	1,785,600	2,707,200	3,628,800	5,472,000



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

AT10-NIRO | Pitch: 10 mm

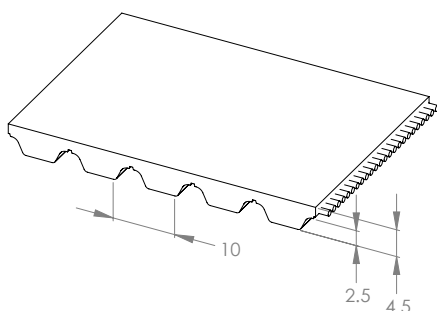


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	20
Minimum Pulley Diameter	63.66 mm
Minimum Back Bend Diameter	160 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)						
Steel	10,688	13,538	22,088	33,488	44,888	67,668
Allowable Belt Force F_{fall} (N)						
Steel	2,806	3,554	5,799	8,791	11,784	17,770
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	2,580	3,302	5,160	7,740	10,320	15,480
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0057					
Specific Belt Stiffness c_{sp} (N)						
Steel	701,438	888,488	1,449,638	2,197,838	2,946,038	4,442,438



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

ATL10 | Pitch: 10 mm

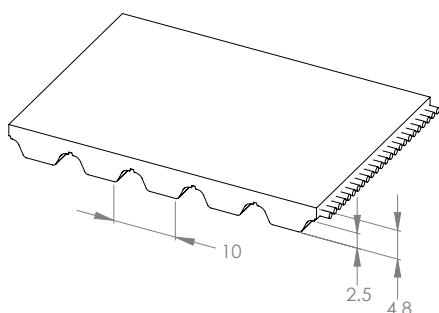


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	25
Minimum Pulley Diameter	79.58 mm
Minimum Back Bend Diameter	150 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)						
Steel	20,760	25,950	43,250	65,740	88,230	133,210
Allowable Belt Force F_{fall} (N)						
Steel	5,079	6,348	10,581	16,082	21,584	32,588
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	2,580	3,302	5,160	7,740	10,320	15,480
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0067					
Specific Belt Stiffness c_{sp} (N)						
Steel	1,269,666	1,587,083	2,645,138	4,020,609	5,396,081	8,147,024



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

ATL10-HF | Pitch: 10 mm

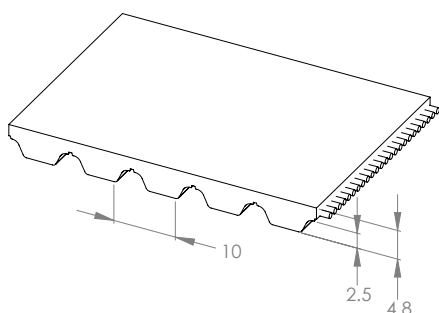

Specifications


Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	20
Minimum Pulley Diameter	63.66 mm
Minimum Back Bend Diameter	130 mm
Standard Lengths	1,520–12,000 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)						
Steel	23,100	28,875	48,125	73,150	98,175	148,225
Allowable Belt Force F_{1all} (N)						
Steel	4,402	5,502	9,170	13,939	18,708	28,245
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	2,580	3,302	5,160	7,740	10,320	15,480
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0072					
Specific Belt Stiffness c_{sp} (N)						
Steel	1,100,450	1,375,563	2,292,604	3,484,758	4,676,913	7,061,221



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

AT20 | Pitch: 20 mm

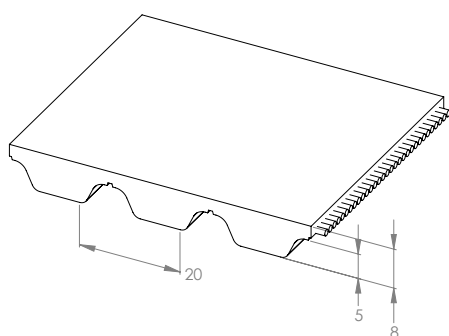


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	18
Minimum Pulley Diameter	114.59 mm
Minimum Back Bend Diameter	180 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	25,950	43,250	65,740	88,230	133,210
Allowable Belt Force F_{all} (N)					
Steel	6,530	10,883	16,542	22,201	33,519
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	6,950	10,860	16,290	21,720	32,580
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0097				
Specific Belt Stiffness c_{sp} (N)					
Steel	1,632,428	2,720,713	4,135,484	5,550,255	8,379,797



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

AT20-HF | Pitch: 20 mm

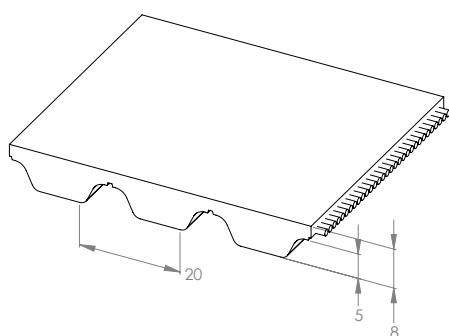


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	18
Minimum Pulley Diameter	114.59 mm
Minimum Back Bend Diameter	150 mm
Standard Lengths	1,520–12,000 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	28,875	48,125	73,150	98,175	148,225
Allowable Belt Force F_{all} (N)					
Steel	5,659	9,432	14,337	19,242	29,052
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	6,950	10,860	16,290	21,720	32,580
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0101				
Specific Belt Stiffness c_{sp} (N)					
Steel	1,414,864	2,358,107	3,584,322	4,810,538	7,262,969



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

ATL20 | Pitch: 20 mm

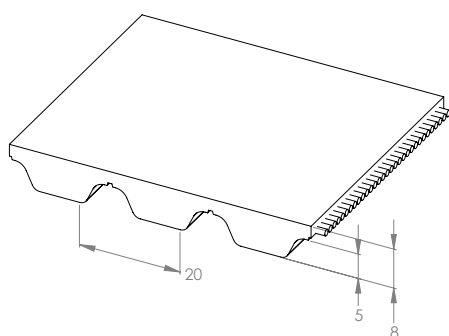


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	25
Minimum Pulley Diameter	159.15 mm
Minimum Back Bend Diameter	250 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	32,000	54,400	83,200	112,000	172,800
Allowable Belt Force F_{all} (N)					
Steel	7,918	13,461	20,587	27,714	42,758
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	6,950	10,860	16,290	21,720	32,580
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0108				
Specific Belt Stiffness c_{sp} (N)					
Steel	1,979,545	3,365,227	5,146,817	6,928,408	10,689,543



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

ATL20-NIRO | Pitch: 20 mm

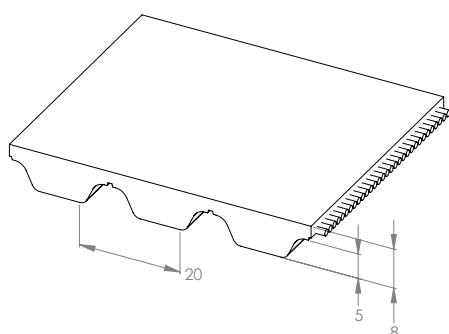


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	26
Minimum Pulley Diameter	165.52 mm
Minimum Back Bend Diameter	260 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,760 mm

Standard Width (mm)	32	50	75	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	22,500	38,250	58,500	78,750	121,500
Allowable Belt Force F_{all} (N)					
Steel	6,110	10,388	15,887	21,386	32,996
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	6,950	10,860	16,290	21,720	32,580
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0106				
Specific Belt Stiffness c_{sp} (N)					
Steel	1,527,600	2,596,920	3,971,760	5,346,600	8,249,040



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®5 | Pitch: 5 mm




Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	16
Minimum Pulley Diameter	25.46 mm
Minimum Back Bend Diameter	80 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	50	75	100
Tensile Strength (Average Value) F_{Break} (N)				
Steel	7,410	14,700	22,260	29,820
Allowable Belt Force F_{all} (N)				
Steel	1,909	3,929	5,950	7,971
Allowable Effective Force F_{eall} (N)				
(Minimum 15 Teeth are in Mesh)	1,020	2,040	3,060	4,080
Specific Belt Mass m_{sp} (kg/m/mm)				
Steel	0.0044			
Specific Belt Stiffness c_{sp} (N)				
Steel	477,135	982,316	1,487,507	1,992,699



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®L5 | Pitch: 5 mm



Specifications


Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	14
Minimum Pulley Diameter	22.28 mm
Minimum Back Bend Diameter	60 mm
Standard Lengths	1,520–12,000 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	50	75	100
Tensile Strength (Average Value) F_{Break} (N)				
Steel	10,540	21,700	32,860	44,020
Allowable Belt Force F_{all} (N)				
Steel	2,340	4,818	7,295	9,773
Allowable Effective Force F_{eall} (N)				
(Minimum 15 Teeth are in Mesh)	1,020	2,040	3,060	4,080
Specific Belt Mass m_{sp} (kg/m/mm)				
Steel	0.0049			
Specific Belt Stiffness c_{sp} (N)				
Steel	585,000	1,204,412	1,823,824	2,443,235



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®8 | Pitch: 8 mm

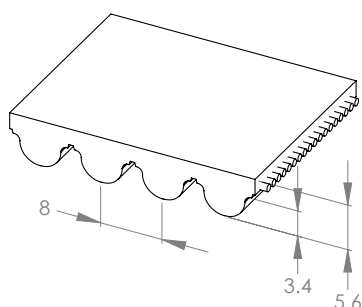


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	20
Minimum Pulley Diameter	50.93 mm
Minimum Back Bend Diameter	120 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,752 mm

Standard Width (mm)	25	32	50	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	14,250	18,050	29,450	59,850	90,250
Allowable Belt Force F_{all} (N)					
Steel	3,741	4,739	7,731	15,712	23,693
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	1,870	2,394	3,740	7,480	11,220
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0069				
Specific Belt Stiffness c_{sp} (N)					
Steel	935,250	1,184,650	1,932,850	3,928,050	5,923,250



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®8-HF | Pitch: 8 mm

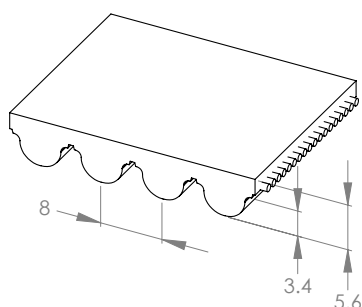


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	16
Minimum Pulley Diameter	40.74 mm
Minimum Back Bend Diameter	100 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,752 mm

Standard Width (mm)	25	32	50	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	12,975	16,435	26,815	54,495	82,175
Allowable Belt Force F_{all} (N)					
Steel	3,456	4,378	7,142	14,515	21,888
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	1,870	2,394	3,740	7,480	11,220
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0066				
Specific Belt Stiffness c_{sp} (N)					
Steel	864,000	1,094,400	1,785,600	3,628,800	5,472,000



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®8-NIRO | Pitch: 8 mm

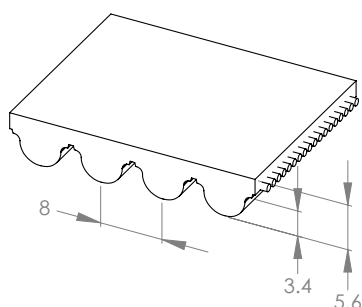


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	25
Minimum Pulley Diameter	63.66 mm
Minimum Back Bend Diameter	150 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,752 mm

Standard Width (mm)	25	32	50	100	150
Tensile Strength (Average Value) F_{Break} (N)					
Steel	10,688	13,538	22,088	44,888	67,688
Allowable Belt Force F_{all} (N)					
Steel	2,806	3,554	5,799	11,784	17,770
Allowable Effective Force F_{eall} (N)					
(Minimum 15 Teeth are in Mesh)	1,870	2,394	3,740	7,480	11,220
Specific Belt Mass m_{sp} (kg/m/mm)					
Steel	0.0068				
Specific Belt Stiffness c_{sp} (N)					
Steel	701,438	888,488	1,449,638	2,946,038	4,442,438



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®14 | Pitch: 14 mm

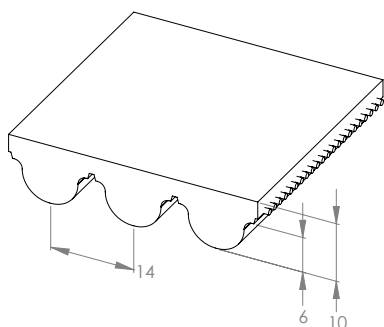


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	28
Minimum Pulley Diameter	124.78 mm
Minimum Back Bend Diameter	200 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	100 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	40	55	85	115	170
Tensile Strength (Average Value) F_{Break} (N)						
Steel	20,760	32,870	46,710	74,390	100,340	150,510
Allowable Belt Force F_{1all} (N)						
Steel	5,156	8,164	11,601	18,476	24,921	37,381
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	3,430	5,488	7,546	11,662	15,778	23,324
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0108					
Specific Belt Stiffness c_{sp} (N)						
Steel	1,289,000	2,040,917	2,900,250	4,618,917	6,230,167	9,345,250



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

HTD®14-HF | Pitch: 14 mm

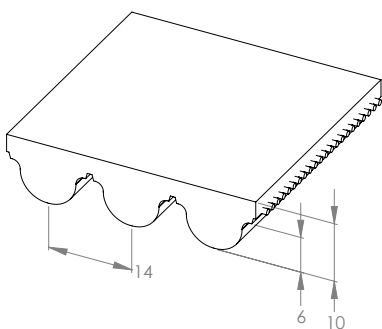

Specifications


Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	23
Minimum Pulley Diameter	102.50 mm
Minimum Back Bend Diameter	160 mm
Standard Lengths	1,520–12,000 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,750 mm

Standard Width (mm)	25	40	55	85	115	170
Tensile Strength (Average Value) F_{Break} (N)						
Steel	23,100	36,575	51,975	82,775	111,650	167,475
Allowable Belt Force F_{1all} (N)						
Steel	4,470	7,077	10,056	16,016	21,603	32,404
Allowable Effective Force F_{eall} (N)						
(Minimum 15 Teeth are in Mesh)	3,430	5,488	7,546	11,662	15,778	23,324
Specific Belt Mass m_{sp} (kg/m/mm)						
Steel	0.0111					
Specific Belt Stiffness c_{sp} (N)						
Steel	1,117,380	1,769,185	2,514,105	4,003,945	5,400,670	8,101,005



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

H | Pitch: 12.7 mm

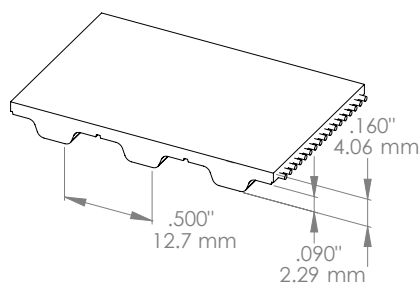


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	14
Minimum Pulley Diameter	56.60 mm
Minimum Back Bend Diameter	79.4 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	101.6 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,752.6 mm

Standard Width (mm)	12.7	19.05	25.4	38.1	50.8	76.2	101.6	152.4
Tensile Strength (Average Value) F_{Break} (N)								
Steel	3,360	5,040	7,140	10,920	14,700	22,260	29,820	44,940
Allowable Belt Force F_{all} (N)								
Steel	898	1,347	1,909	2,919	3,929	5,950	7,971	12,012
Allowable Effective Force F_{eall} (N)								
(Minimum 15 Teeth are in Mesh)	980	1,470	1,960	2,940	3,920	5,880	7,840	11,760
Specific Belt Mass m_{sp} (kg/m/mm)								
Steel	0.0040							
Specific Belt Stiffness c_{sp} (N)								
Steel	224,529	336,794	477,125	729,721	982,316	1,487,507	1,992,699	3,003,081



SUPER FLEX™ BELTS TRULY ENDLESS FLEX BELTS

H-HF | Pitch: 12.7 mm

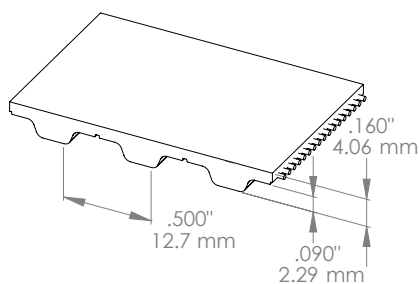


Specifications	
Standard Colour	White
Width Tolerance up to 50 mm Width > 50 mm Width	± 0.5 mm ± 0.75 mm
Minimum Number of Pulley Teeth z_{min}	12
Minimum Pulley Diameter	48.51 mm
Minimum Back Bend Diameter	60.3 mm
Standard Lengths	1,520–24,000 mm
Maximum Width for Belt Length > 12,000 mm	101.6 mm
Minimum Belt Length for Belts with Fabric on Tooth Side	1,752.6 mm

Standard Width (mm)	12.7	19.05	25.4	38.1	50.8	76.2	101.6	152.4
Tensile Strength (Average Value) F_{Break} (N)								
Steel	4,960	7,440	10,540	16,120	21,700	32,860	44,020	66,340
Allowable Belt Force F_{all} (N)								
Steel	1,101	1,652	2,340	3,579	4,818	7,295	9,773	14,728
Allowable Effective Force F_{eall} (N)								
(Minimum 15 Teeth are in Mesh)	980	1,470	1,960	2,940	3,920	5,880	7,840	11,760
Specific Belt Mass m_{sp} (kg/m/mm)								
Steel	0.0043							
Specific Belt Stiffness c_{sp} (N)								
Steel	275,294	412,941	585,000	894,706	1,204,412	1,823,824	2,443,235	3,682,059



POWERING PROGRESS™

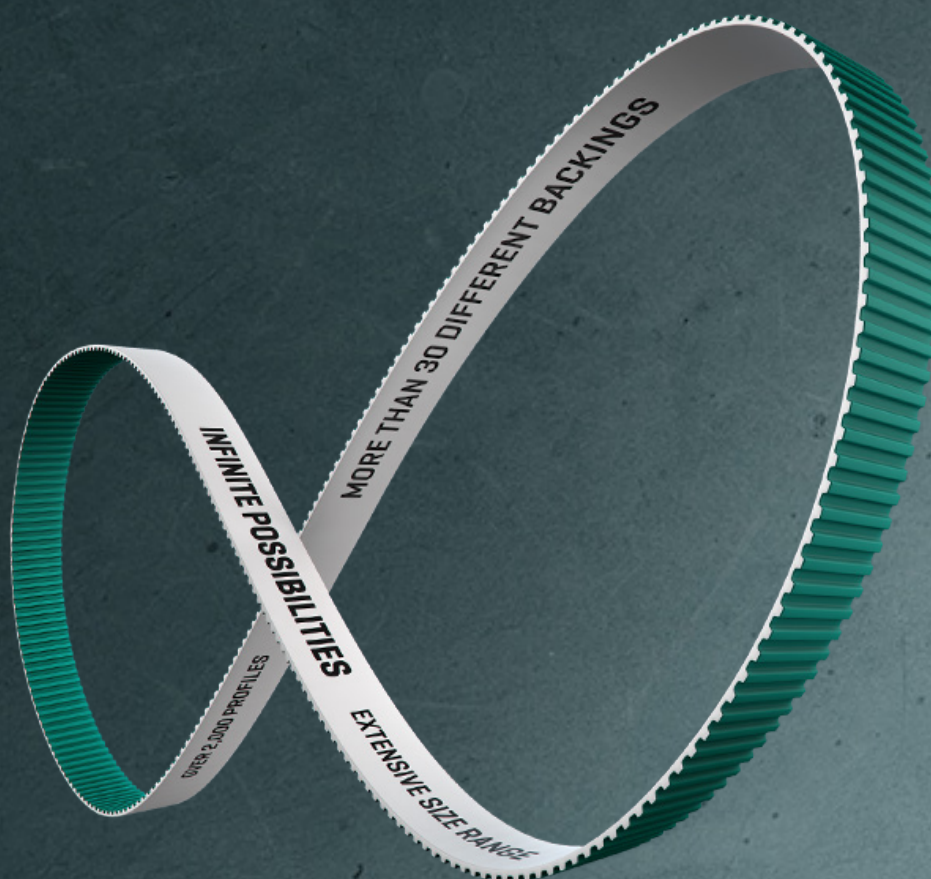

GERMANY

GATES MECTROL GMBH

Werner-von-Siemens-Str. 2
64319 Pfungstadt

T [49] 06 157 9727 0 / **F** [49] 06 157 9727 272

GERMANY

GATES GMBH

Eisenbahnweg 50
52068 Aachen

T [49] 241 5108 226 / **F** [49] 241 5108 297

ITALY

GATES S.R.L.

Via Senigallia 18 - Blocco A
20161 Milano MI

T [39] 02 662 16 21 / **F** [39] 02 662 21 851

BELGIUM

GATES EUROPE BVBA

Korte Keppestraat 21/51
9320 Erembodegem

T [32] 53 76 28 41 / **F** [32] 53 76 26 09

FRANCE

GATES FRANCE S.A.R.L.

B.P. 37
12, Rue de la Briqueterie
Zone Industrielle, 95380 Louvres

T [33] 1 34 47 41 45 / **F** [33] 1 34 72 20 54

RUSSIA

GATES CIS LLC

Kosmodamianskaja nab. 52, building 4
Business Centre Riverside Towers, 6th floor
115054 Moscow

T [7] 495 933 83 71 / **F** [7] 495 933 83 78